


Figure 406. USART block diagram

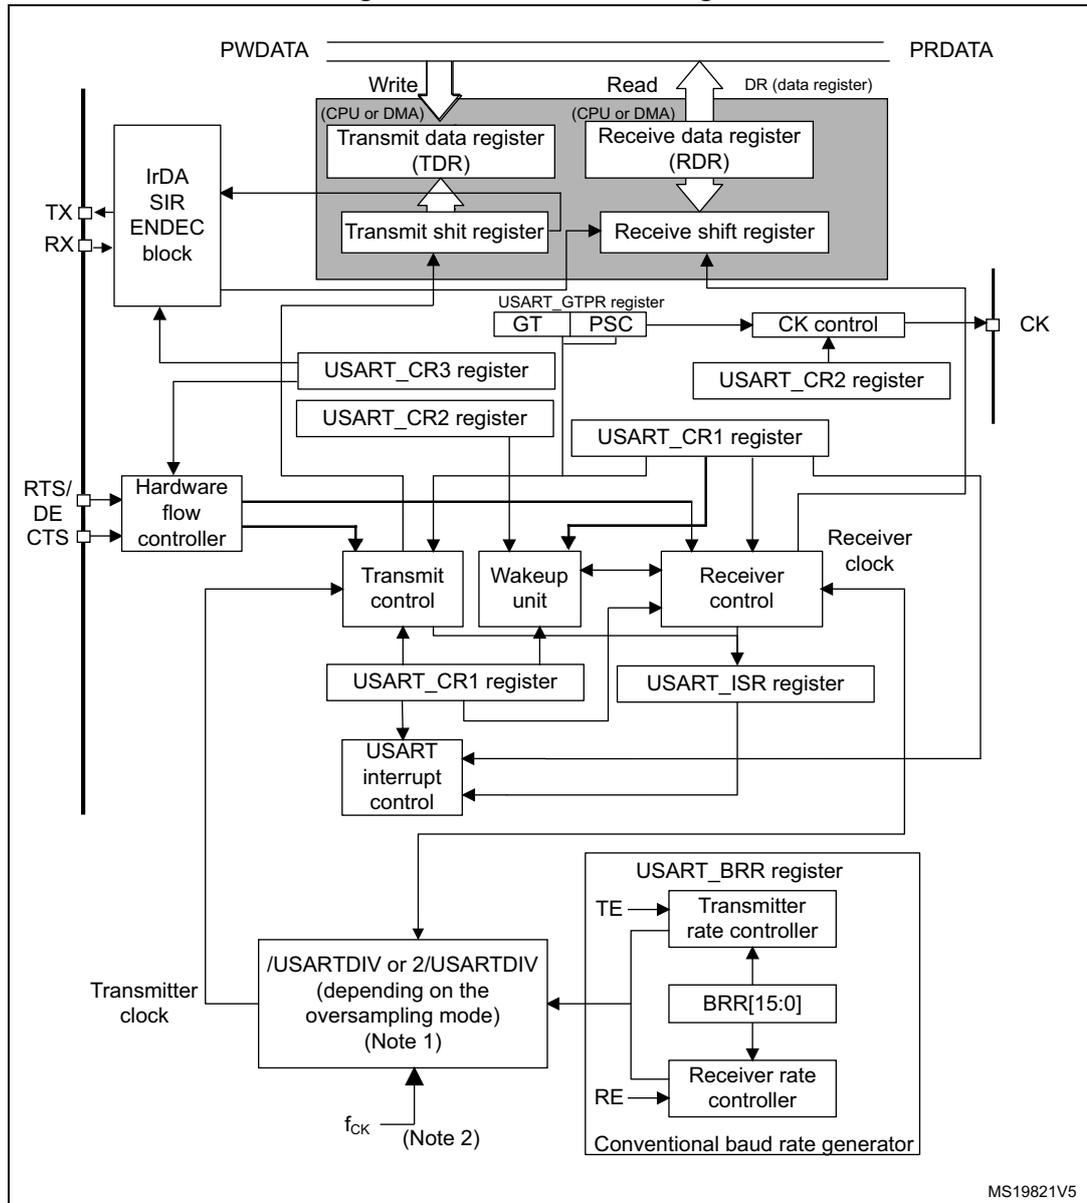

MS19821V5

1. For details on coding USARTDIV in the USART\_BRR register, please refer to [Section 40.5.4: USART baud rate generation](#).
2.  $f_{CK}$  can be  $f_{LSE}$ ,  $f_{HSI}$ ,  $f_{PCLK}$ ,  $f_{SYS}$ .